

Parts List

No.	Name	No.	Name	No.	Name	No.	Name
01	Upper Elbow	02	Sealing Ring	03	Tee	04	Air Valve Chamber Cover
05	Small Slider	06	Large Slider	07	Large Slider Seat	08	Boot Block
09	Boot Block Washer	10	Air Valve Chamber Washer	11	Booster Power Lever	12	Booster Power Lever Sealing Ring
13	Connecting Rod Axis	14	Booster Power Lever Sleeve	15	Connecting Rod Axis Sleeve	16	V-ring
17	Piston	18	Piston Sleeve	19	Ball Valve	20	Ball Seat
21	Ball Seat Sealing Ring	22	Lower Elbow	23	Stand Column	24	Outer Pressure Plate
25	Outer Pressure Plate Screw	26	Santoprene Diaphragm	27	Teflon Diaphragm	28	Clap Board
29	Inner Pressure Plate	30	Clap Board	31	Air Valve Chamber	32	Air Valve Chamber Washer

BFQ-25 Aluminum alloy


Specifications

	BFQ-25
Max. Flow Rate	116 lpm
Max. Head	84 m
Max. Suction Height	5.48 m
Max. Working Pressure	8.4 bar
Fluid Inlet/Outlet Size	DN25 (1")
Air Inlet Size	1/2" G (bspp)
Max. Permitted Grain	3.2 mm
Max. Air Consumption	0.67 m ³ /min
Air Compressor Power	5.5 kw
Every Reciprocating Flow	0.57 L
Max. Reciprocating Speed	276 cpm
Pump body structure materials:	Cast steel Nodular cast iron Aluminum alloy PP Stainless steel PVDF






Aluminum alloy

Installation dimensions





Vertical View


Front View



Upward View

Left Side View



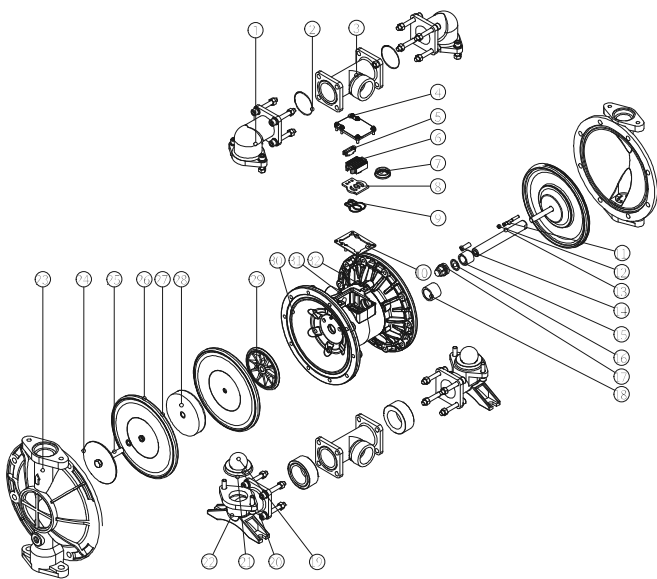

Parts List

No.	Name	No.	Name	No.	Name	No.	Name
01	Upper Elbow	02	Sealing Ring	03	Tee	04	Air Valve Chamber Cover
05	Small Slider	06	Large Slider	07	Large Slider Seat	08	Boot Block
09	Boot Block Washer	10	Air Valve Chamber Washer	11	Booster Power Lever	12	Booster Power Lever Sealing Ring
13	Connecting Rod Axis	14	Booster Power Lever Sleeve	15	Connecting Rod Axis Sleeve	16	V-ring
17	Piston	18	Piston Sleeve	19	Ball Valve	20	Ball Seat
21	Ball Seat Sealing Ring	22	Lower Elbow	23	Stand Column	24	Outer Pressure Plate
25	Outer Pressure Plate Screw	26	Santoprene Diaphragm	27	Teflon Diaphragm	28	Clap Board
29	Inner Pressure Plate	30	Clap Board	31	Air Valve Chamber	32	Air Valve Chamber Washer

BFQ-25

Stainless steel / Cast steel

Specifications




	BFQ-25
Max. Flow Rate	116 lpm
Max. Head	84 m
Max. Suction Height	5.48 m
Max. Working Pressure	8.4 bar
Fluid Inlet/Outlet Size	DN25 (1")
Air Inlet Size	1/2" G (bspp)
Max. Permitted Grain	3.2 mm
Max. Air Consumption	0.67 m ³ /min
Air Compressor Power	5.5 kw
Every Reciprocating Flow	0.57 L
Max. Reciprocating Speed	276 cpm

Pump body structure materials: Cast steel Nodular cast iron Aluminum alloy PP Stainless steel PVDF



Stainless steel

Installation dimensions

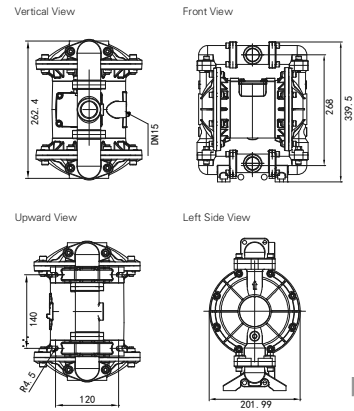

Note: GODD Manufacturing Co., Ltd reserves the right to change product design without prior notice. Please consult sales for latest product size.